

aussie
lifts



ELEVATE THE
HOME YOU LOVE

Australian made residential
and commercial elevators

GEMINI

A LIFE-CHANGING & VALUE-ADDING INVESTMENT



GEMINI

ACCESSIBLE, STYLISH & LUXURIOUS SINCE 1995

After the proven success of the original Gemini's lift structure and our oil hydraulic system, we have been able to combine the two to provide a lift that is reliable, cost-effective and easy to service.

Boasting a lifting capacity of 350kg, the Gemini 16 is flexible in sizing whilst also being quiet and fast in operation.



RESIDENTIAL LIFT PROMISE



AUSTRALIAN DESIGNED AND MADE

Our low-maintenance lifts are designed and built locally to the highest standards. As one of the few non-importers in the market, every model exceeds Australian Standards (Part 12, 14, 16, 17 and 18) and is BCA compliant (BCA E3.3 & E3.6) for disability access.



FAST AND PROFESSIONAL

An Aussie Lift is manufactured, delivered and installed three times faster than imports. We can have your product to you from eight weeks, compared to the 26-week turnaround of competitors.



LEADING WARRANTY AND LOCAL SUPPORT

Our quality guarantees are second to none in the industry. If you ever do need replacement parts, they're available right here – minimising downtime and delays, compared to waiting for components from overseas.



COST-EFFECTIVE AND SIMPLE

Every Aussie Lift has low installation, maintenance and running costs – with just annual servicing required. They also don't need load-bearing walls or machine rooms, which makes them suitable for more homes.

GEMINI OPTIONS

CHOOSE THE RIGHT ELEMENTS FOR YOUR LIFT

A selection of customisable options are available for the Gemini Lift.

Discuss these possibilities with your sales representative.



Post and Rail
Brushed Stainless



Post and Rail
Powder Coated



Return Handrail
Brushed Stainless



Return Handrail
Powder Coated



White



Silver




Black



Powder Coated
Swing door with
translucent glass

Custom Colours Available

Options available to match colours with doors in your home

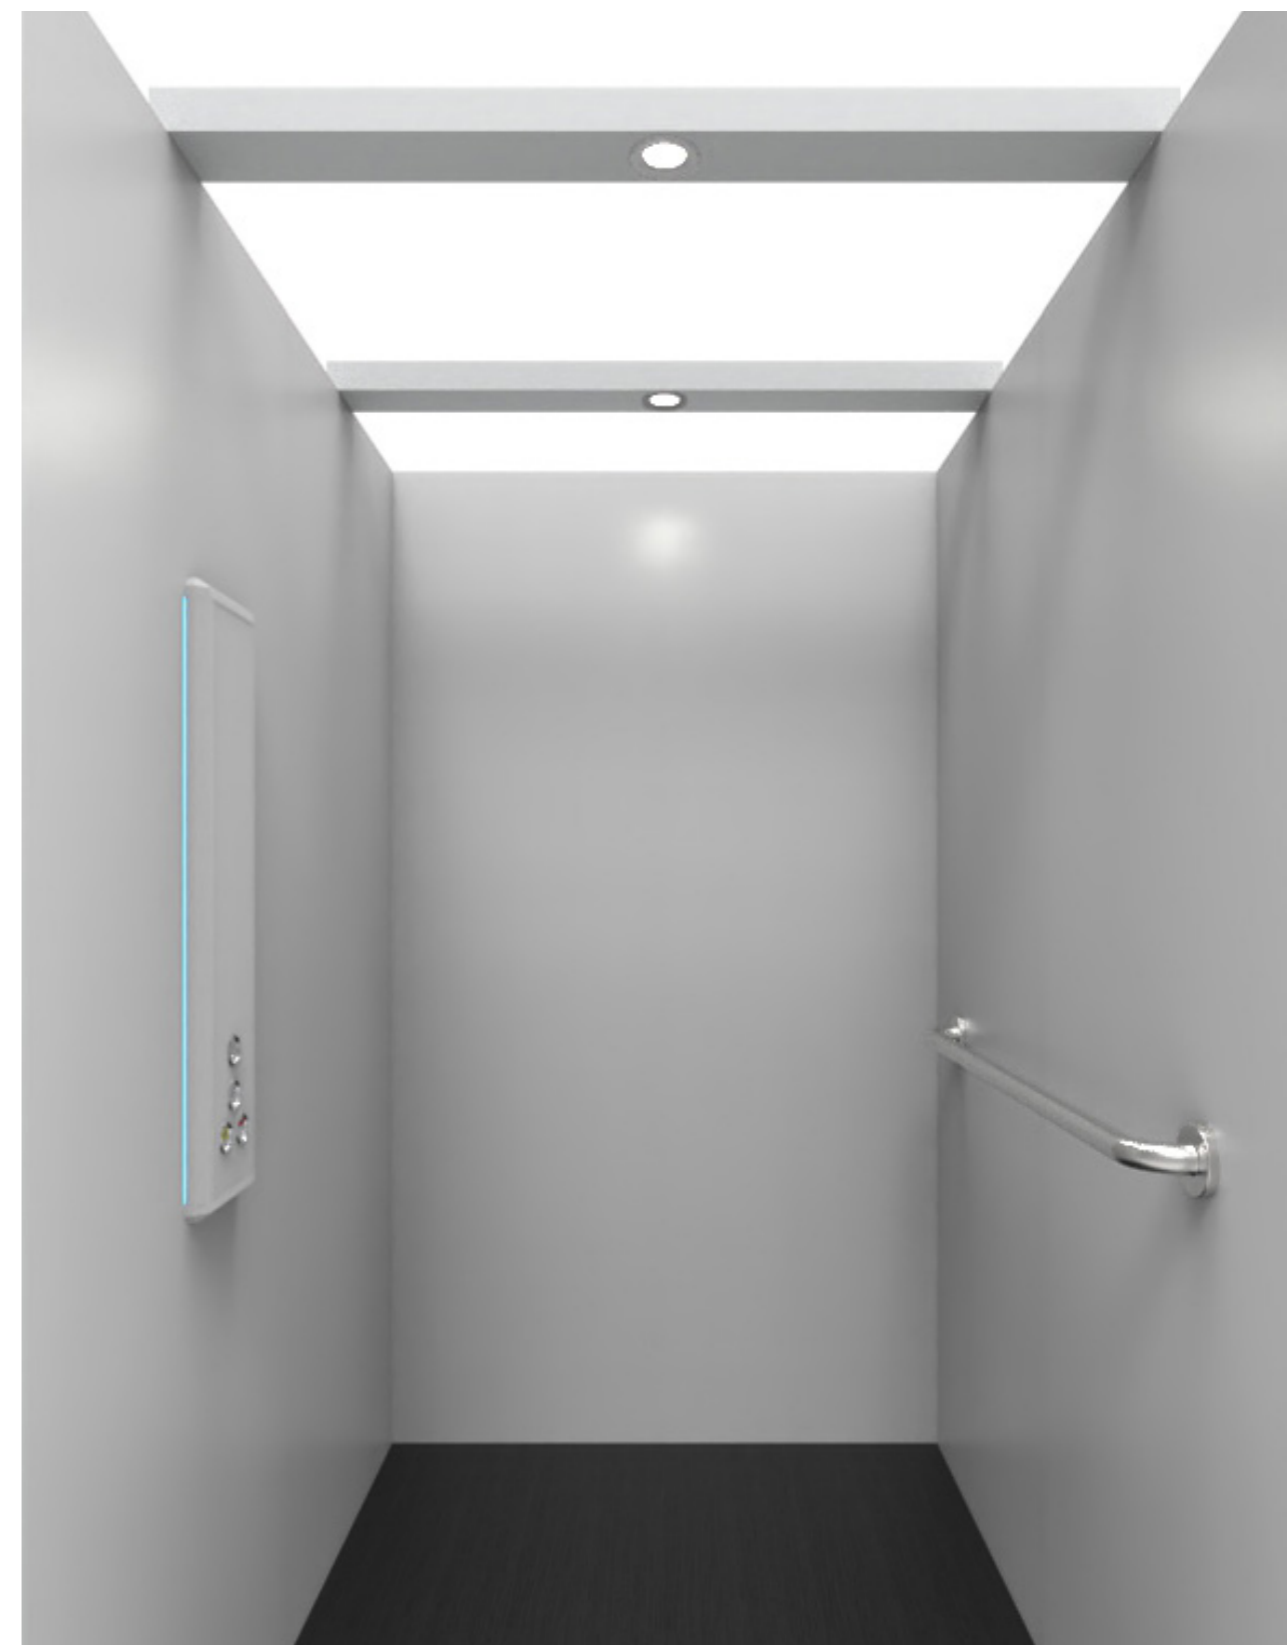

Example

A wide range of lift car interiors are available to suit your personal requirements, please contact our sales team to discuss the options available

GEMINI

STANDARD MEASUREMENTS

Weight Capacity: 350kg

Lift Speed: 0.145m/s

Max Travel: 3500mm

Compliance: AS1735 16


Application: External

Control: Automatic Operation and Key Isolation

Power Supply: 240v (20amp RCD Breaker)

Door configurations: Right or left swing, up to 2 doors per landing

Description	Car Width	Car Depth	Car Height	Shaft Width	Shaft Depth	Door Width
Key	A	B	C	D	E	F
Single Entry - Standard	900	1300	2020	1375	1495	920
Dual Entry - Standard	900	1300	2020	1375	1495	920
Single Entry - Deluxe	1100	1400	2020	1575	1595	920
Dual Entry - Deluxe	1100	1400	2020	1575	1595	920

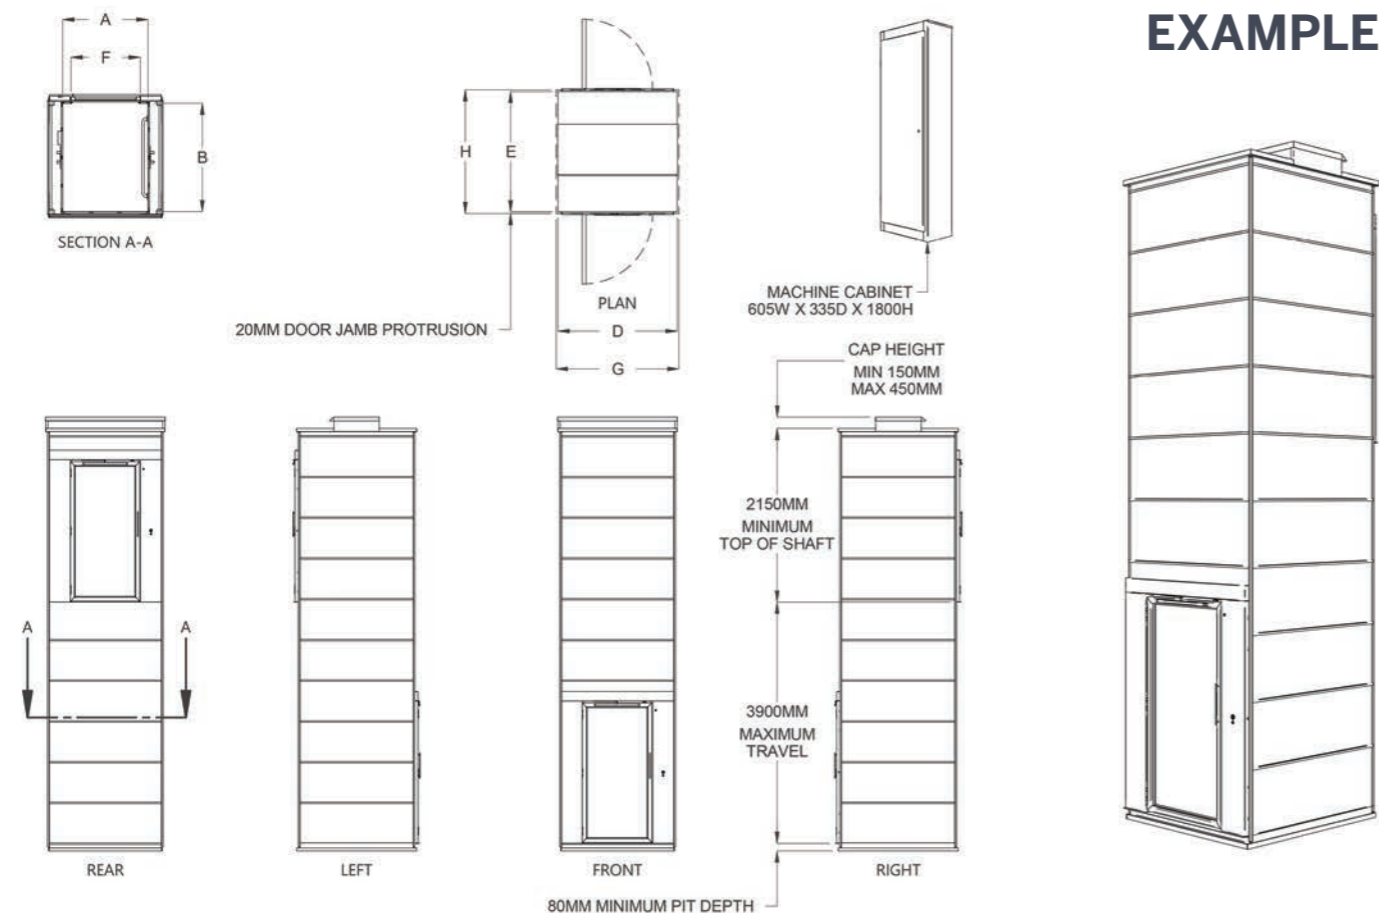

SAFETY FEATURES



Supplied with an impressive list of standard safety features, the Gemini 16 offers peace of mind with it's in-car emergency telephone, infra-red door sensors, emergency battery backup lowering system and lighting. On top of that, the machine cabinet has a very easy to use manual lowering valve, should the lift car ever need to be lowered.

PIECE OF MIND



Manufactured in Australia since 1994. Built to Australian conditions. Guaranteed availability of parts for 15 years. Industry-leading Warranty. Custom built to your specification. Unrivalled after-sales service.

INSTALLATION



Usually installed within a day or two, by either craning in, dismantling or maneuvering into place, the Gemini 16 offers diversity depending on location and access.

COST EFFECTIVE



Self Supporting Shaft - no load-bearing walls required. No separate machine room construction required. Lift is pre-assembled and commissioned at our factory before dispatch to site. Low service costs and power consumption. Can be installed externally up to wind region C3.

MAINTENANCE



For optimum performance, reliability, and long term use, the lift should be serviced every 12 months by an approved lift technician.

CUSTOMISATIONS



Each lift is custom designed and constructed to your requirements with an impressive list of options available including: Automatic door operators; Voice Control of the lift; Access Control security features; Flood switch sensors for flood zones; and door options to match your existing property.

OVERVIEW

MAX TRAVEL DISTANCE

3900mm

DRIVE SYSTEM

Dual oil hydraulic cylinders

LIFT SPEED

0.175 m/sec

CAPACITY

350 kg

PIT REQUIREMENT

80 mm Minimum

INSTALLATION

External

DUAL ENTRY

A range of lift car sizes available

GENMIN



aussie
lifts



CALL US

1800 287 543



EMAIL US

info@aussielifts.com.au

